

BV255 RF Dimmer/Receiver

12-36v

BV255 RF dimmer/receiver generates 2 x stable outputs for dimming LED lamps and fittings. Designed for use only with BV206 (order separately)



TECHNICAL SPECIFICATION


- 170mm x 46mm x 20mm
- Input voltage 12v – 36v
- Max Wattage:
 - 192w from 12v supply
 - 384w from 24v supply
 - 576w from 36v supply
- 2 channels

COMPLIANCE & WARRANTY

- 2 Year Warranty
- CE / RoHS Compliant

INSTALLATION

BV255 receiver unit does not work as a standalone product. It requires an input power supply 12v-36v and works in conjunction with a BV206 2 zone remote handset. Site the receiver unit in-line after transformer, and place inside an IP rated enclosure such as a T9807 (order separately)

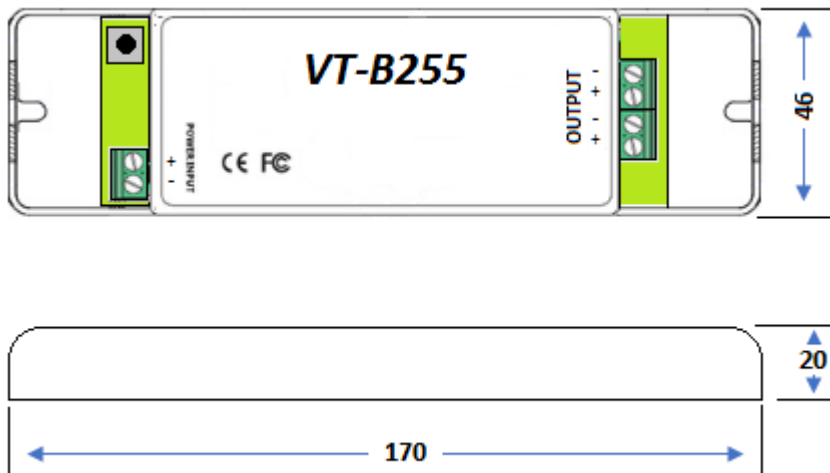

COMPATIBILITY

CAPDISC3WW	×	MR16COB260L60	×	MR16LED4.5W	×
CAPLED2WWN	×	MR16COB480LD	✓	MR16LED5WW36	✓
CAPLED3WWN	×	MR16COB630LD15	✓	MR16LED5WW60	✓
CAPLED4WWN	×	MR16COB630LD30	✓	MR16LED6W	✓
MR11COB220L	×	MR16COB630LD60	✓		
MR16C500L38	✓	MR16LED3WW36	×		
MR16COB260L	×	MR16LED3WWN	×		

B3001WWKIT	✓	E3311W-N	×	E3421WW	×
E3111W-N	×	E3311WW	×	ERL005-06C	✓
E3111WWN	×	E3321W	×	ERU010-01A	×
E3211WNN	✓	E3321WW	×	GLWW03W	×
E3211WWN	✓	E3411W-N	×	GLWW18W	✓
E3221WNN	✓	E3411WW	×	GLWW18WS	✓
E3221WWNC	✓	E3421W	×	GLWW1W	×
GLWW6Ws	×	GLWW8W	✓	GLWW8WS	✓