



GL016 SQ

1W, 95lm square ground light

Features

IK rating	IK09
IP rating	IP68
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

Cut Out Size	Ø 50mm
UK Bathroom Zone	0
Construction Material	Stainless steel (316)
Weight	400g
Maximum Ambient Temperature	50°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
			350mA				700mA			
GL016 SQ NW	4000K	26°	1W	95	90	267	2W	140	65	381
GL016 SQ 27	2700K	26°	1W	70	70	196	2W	120	60	337

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	1	1	9
PLD UNI-DRIVE 350MA	N/A	Yes	Yes (1-10V)	2	1	10
PLU/700 3-9	N/A	Yes	No	1	3	9

Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors
TUBE/50	Installation tube
WCR 275 BLACK	2-core rubber cable
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 year extended warranty


Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- Low voltage groundlight
- Robust cable for outdoor use
- Shallow depth for easy installation
- Marine-grade stainless steel 316

Light source
energy efficiency:



Beam angle: 26°

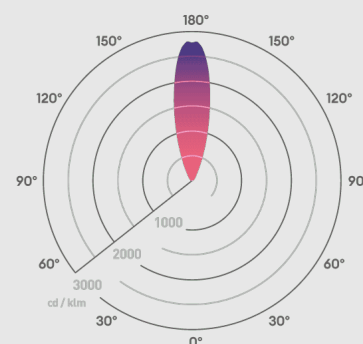

60x60mm

