



GL041

3W, 200lm ground light

Features

IK rating	IK08
IP rating	IP68
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

Cut Out Size	Ø 65mm
UK Bathroom Zone	0
Construction Material	Stainless steel (316)
Weight	760g
Maximum Ambient Temperature	35°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
			350mA				700mA			
GL041 F NW	4000K	20°	3W	200	67	1800	6W	450	75	5163
GL041 F WW	3000K	20°	3W	160	53	1253	6W	440	73	2853
GL041 S WW	3000K	12°	3W	160	53	3210	6W	440	73	5049

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	1	1	3
PLR/350 1-5	N/A	Yes	No	0	1	1
PLD UNI-DRIVE 700MA	N/A	Yes	Yes (I-10V)	2	1	3

Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors
TUBE/68	Installation tube
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled
 /collingwoodlighting
 collingwoodlighting

Guarantee

7 year extended warranty


Features & benefits

3W at 350mA or 6W at 700mA
Coastal protected
Low voltage groundlight
Marine grade stainless steel 316
Long lifetime of 70,000hrs
Robust cable for outdoor use

Light source
energy efficiency:



Beam angles: 12° 20°

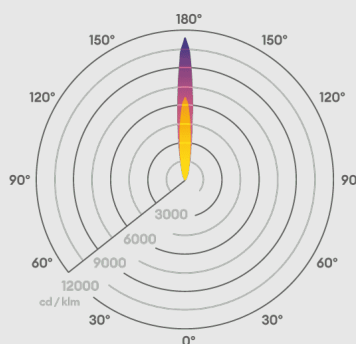

76x76mm

