



WL220 MAINS

Straight to mains LED wall light

Features

IP rating	IP65
CSP Switchable	Fixed colour
Dimmable Option	No
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

Inrush Current	60A 0.037ms
Construction Material	Anodised aluminium, stainless steel 316, copper
Weight	WL220B: 500g WL220C: 1200g WL220D: 1000g WL220Z: 500g
Maximum Ambient Temperature	50°C
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
WL220DWBM40	Silver	5.7W	4000K	40°	530	93	1205
WL220ZWBW30	Bronze	5.7W	3000K	40°	520	91	1182
WL220BWBW30	Black	5.7W	3000K	40°	520	91	1182
WL220DWBM30	Silver	5.7W	3000K	40°	520	91	1182
WL220ZWBW27	Bronze	5.7W	2700K	40°	515	90	1171
WL220BWBW27	Bronze	5.7W	2700K	40°	515	90	1171
WL220DWBM27	Silver	5.7W	2700K	40°	515	90	1171
WL220CWBW27	Copper	5.7W	2700K	40°	515	90	1171

LED driver

N/A (integrated SELV driver)	220-240V	Yes	No	N/A	N/A	N/A
------------------------------	----------	-----	----	-----	-----	-----

Accessories

GH220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately
GS220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 year extended guarantee


Features & benefits

- 5.7W
- Coastal protected
- Adjustable LED fitting
- Straight to mains
- High efficacy of 93lm/W
- Improved look and feel with single LED
- New stainless steel and anodised bronze finishes
- Higher light output than predecessor
- Tilts 90° and Rotates 330°

Light source energy efficiency:



Beam angle: 40°

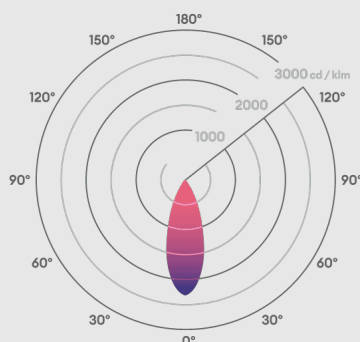

145mm

