Step lights specification sheet



WL340

Asymmetric, straight to mains, brush finish step light

Features

IP rating	IP65
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

Cut Out Size	Ø 80mm
UK Bathroom Zone	2
Inrush Current	9A 0.8ms
Construction Material	Stainless steel (316)
Weight	1000g
Maximum Ambient Temperature	35°C
SELV	Yes
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	W	Colour	Beam	lm	llm/W	lx @ 1m
WL340NW	2.6W	4000K	50°	59	22	65
WL340WW	2.6W	3000K	50°	50	19	54
WL340AB27	2.6W	2700K	50°	49	19	52
WL340ABWW	2.6W	3000K	50°	50	19	54

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED driver

N/A (integrated SELV driver)	220-240V	N/A	No	2	N/A	N/A

Accessories

Installation tube included		
JB5	Gel filled waterproof connector	Sold Separately
WC 5-9	Quick release waterproof joint	Sold Separately

collingwood

01604 495 151
collingwoodlighting.com

collingwoodled
/collingwoodlighting
collingwoodlighting

Guarantee

7 year extended warranty

Features & benefits

2.6W

Coastal protected

Main voltage step light


Recessed, asymmetric wall or ground light perfect for illuminating walls, steps and pathways

Available in rustic cast stainless steel and sleek brushed stainless steel finishes

Installation tube included

Light source energy efficiency: A to G — F

Beam angles: 50° C0/C180 50° C90/C270

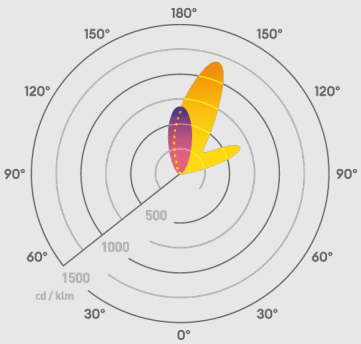

Ø98mm

