

T9209GB – 12V Potted LED Power Supply and IP65 enclosure



Installation notes

A DC Constant voltage power supply for 12V LED lighting such as Elipta Navigator LED lights.


Supplied with an IP65 rated enclosure and polyurethane resin pack.


Note – This product must be installed by a qualified electrician.

Resin safety notes

- Personal protective clothing (gloves, eye protection) should be worn
- Ensure adequate ventilation is available.
- Mild irritation may occur should skin contact occur, in which case immediately wash affected area with soap and water, seeking medical advice if reaction persists.
- If in contact with eyes, bathe the eye with running water for 15 minutes, and seek medical attention if discomfort continues.
- Harmful if inhaled – if a tightness of the chest, a cough develops, or shortness of breath occurs after using this product seek immediate medical advice.

Part code	T9209GB
Dimensions (mm)	148x35x30
Enclosure dimensions (mm)	160x120x71
Cable length (mm)	200
Construction	Polycarbonate
Input voltage	240V 50Hz
Output voltage	12V DC
Max wattage	35W
Class	Class II
IP rating	IP67
Operating temperature	-30° to +75°C
Inrush current	60A max @ 240V
Gross weight (g)	1158
Net weight (g)	1170
Warranty	2 Years
Origin of manufacture	PRC

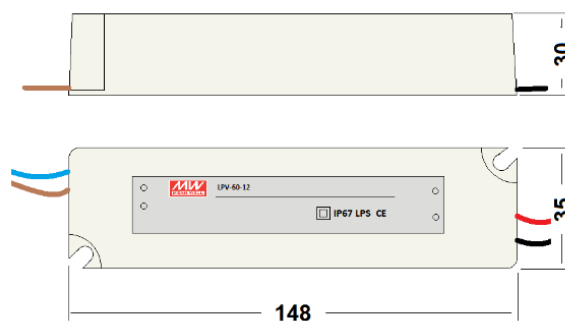

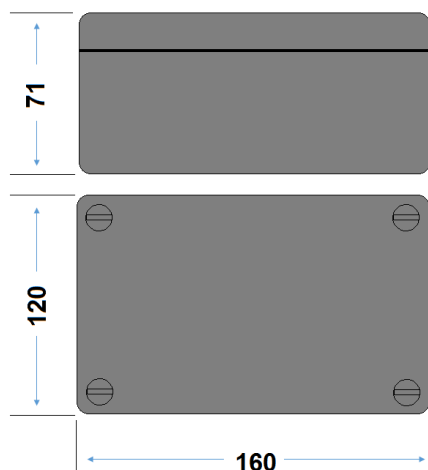

2 YEAR WARRANTY

Electronic Controllers, Power
Supplies & LED Drivers

Exclusions: Damage due to incorrect installation or misuse. Responsibility for 3rd party costs; indirect or consequential loss.